

SCHROEDAHL

we protect your business

Series MRM

For nominal pressures
up to 640 bar/ 4500 lbs

Automatic minimum flow recirculation for
pump protection



Preamble

Modern process industry often requires centrifugal pumps to operate with fluctuating flows. This is a result of automated control of such processes. Too low flows in centrifugal pumps however may result in overheating and lead to damage or cause unstable operation. It is important that flows through a pump do not get below a certain minimum as stated by the pump manufacturer.

Automatic recirculation control

During the last decades SCHROEDAHL has developed a series of valves, which provide automatic bypass at low flow conditions. The bypass opens only when the mainflow is throttled to less than the minimum flow. In these valves, which are basically disc-type nonreturn valves, the movement of the disc is used to open or close the bypass.

All valves combine 4 functions in 1:

- Flow sensitive:
The Automatic Recirculation Valve senses the main flow and positions the disc accordingly.
- Non return function:
The Automatic Recirculation Valve also operates as a check valve, preventing a return flow through the pump.
- Automatic recirculation flow:
The Automatic Recirculation Valve bypasses the minimum flow to a deaerator preventing overheating of the pump.
- High pressure reduction:
The cascade element in the bypass reduces the high pressure, this combined with a low noise level and minimum wear and tear.

Installation instructions


The Automatic Recirculation Valve type MRM should be installed as close to the pump as possible, preferably on the pump outlet and in vertical position, horizontal installation is also possible. The distance between the valve and the pump should not exceed 1.5 m (5ft.) to prevent pressure pulsations of the fluid column.

Maintenance

Installation and maintenance instructions upon request. Correct operation of the pump is to be checked with the usual operational test of the pump.

Description

The Automatic Recirculation Valve type MRM protects automatically high pressure centrifugal pumps, especially boiler feed water pumps and high pressure offshore applications, during low loads by ensuring the required minimum flow for the pump.

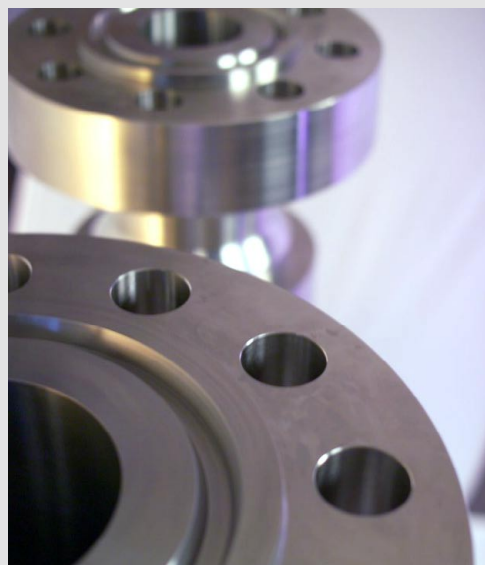

Functioning

The check valve (Pos. 07) moves upwards with an increase in main flow and downwards with a decrease in flow.

The movement of the check valve is transmitted directly via the lever (Pos. 13) to the bypass system.

When the check valve is closed, the bypass is completely open and full bypass flow is allowed to i.e. the deaerator (suctin tank).

With increasing main flow the ceck valve is lifted of its seat and moves upwards.

By doing so the lever closes the bypass in such a way that the sum of feed water and minimum flow remains almost constant. The pump will run therefore always the minimum flow or slightly more till the vortex plug (Pos. 12) is completely closed, only when the bypass is completely closed, full flow to the system is allowed.

The plunger (Pos. 11) hydraulically relieves this system when the bypass is open. As soon as the vortex plug is seated, the hydraulic force of the plunger is however transmitted via the lever to the check valve. The check valve can therefore only move more upward when the main flow has increased so much, that the additional closing force has been overcome. The total system is thereby

stabilised, which is especially important in the area of closing or opening of the bypass system.

The valve is set in the factory in such a way that the specified minimum flow is reached when the check valve is seated (this means that the main flow is zero).

The check valve is strongly damped in its upwards movement by a damper system (Pos. 45).


Should medium oscillation occur with small amplitudes, caused by slight instability and variations in the control application, the check valve only follows downwards towards closing position. With each period the check valve moves therefore more and more downwards towards its seat and thereby reduces the flow. This increases the pressure required for the same flow and solves the swinging automatically. This also applies at system vibration due to other causes.

Special design feature

The MRM offers in comparison to the other Automatic Recirculation Valves the possibility to adjust the minimum flow ($\pm 10\%$) on site, without having to take out the valve. (Please consult us for service).



Fig 1: Valve type MRM

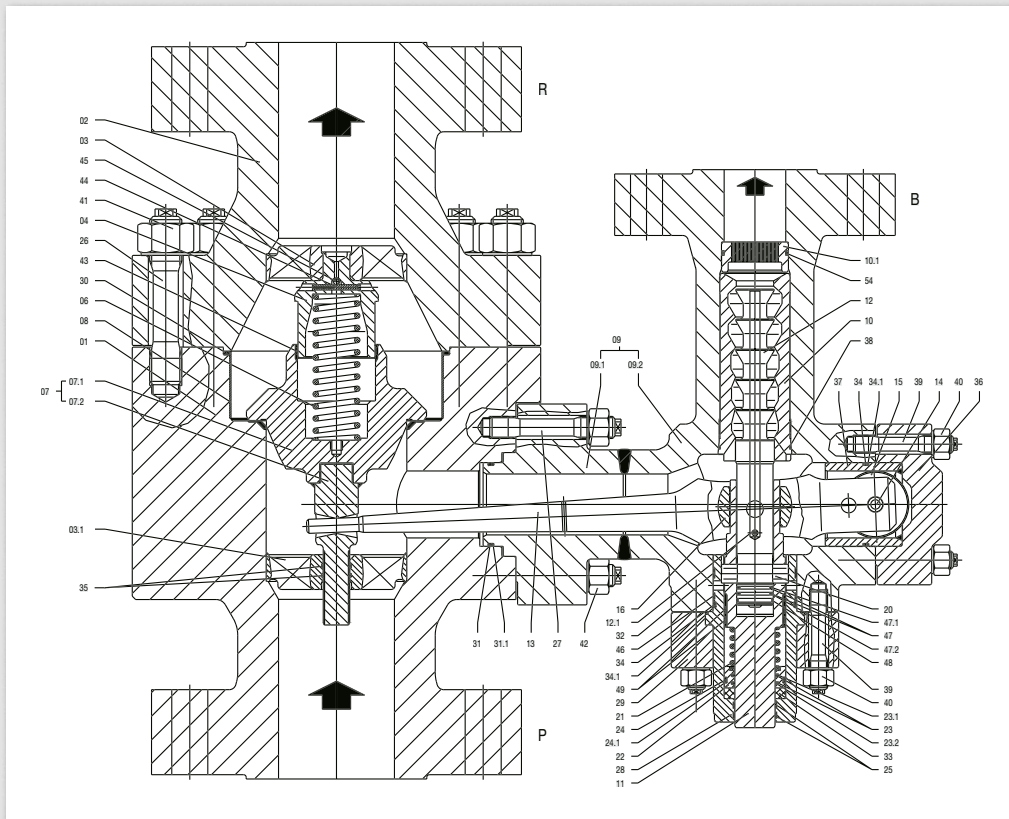

Example:

Design and numbers of stage depends to load condition.

P = Pump end

R = Pipeline end

B = Bypass end

Parts List

MRM Standard Parts List	
Pos.	Description
01	Lower Body
02	Upper Body
03	Stemguide
03.1	Stemguide
04	Guide Bolt
06	Spring
07	Check Valve cpl.
07.1	Check Valve
07.2	Stem
08	Liner
09	Bypass housing cpl.
09.1	Flange
09.2	Bypass
10	Vortex bushing
10.1	Orifice Plate
11	Plunger
12	Vortex Plug
12.1	Pin
13	Lever
14	Pin
15	Roller
16	Link Nut
20	Cotter
21	Spring
22	Gland
23	O-Ring
23.1	Step Seal
23.2	Glyd Ring
24	O-Ring
24.1	Guide Ring
25	Guide Ring
26	Stud Bolt
27	Stud Bolt
28	Packing bushing

MRM Standard Parts List	
Pos.	Description
29	Packing bushing Flange
30	O-Ring
31	O-Ring
31.1	Support Ring
32	Guide Ring
33	Packing Ring
34	O-Ring
34.1	Support Ring
35	Guide Ring
36	Cover
37	Bushing
38	O-Ring
39	Stud Bolt
40	Hexagon Nut
41	Hexagon Nut
42	Hexagon Nut
43	Guide Ring
44	Pin
45	Ball
46	Guide Ring
47	O-Ring
47.1	Step Seal
47.2	Glyd Ring
48	Guide Ring
49	Guide Ring
54	O-Ring

Valve sizes

The MRM type of valves are available in sizes from DN 80 (3") to DN 300 (12"). Spezial application on request.

Connections

Flanges according DIN or ASME, flanges or hubs according other standards (ISO, BS, JIS, NF) upon request.

The valve in- and outlet can also be supplied with welding ends.

Materials

Standard housing material available


- Carbon steel ASTM A105, DIN 1.0460
- Stainless steel ASTM A182, F316L, DIN 1.4404 or ASTM A182 F347, DIN 1.4550
- Duplex steel ASTM A182 F51, DIN 1.4462 or ASTM A182 F55, DIN 1.4501

The standard internals are made of stainless steel with a minimum chrome content of 13 % (not valid for duplex housing material).

Other materials for housing and internals upon request.

Selection of the seal material according to medium and temperature conditions.

Selection of the housing material according to design pressure, design temperature and medium.

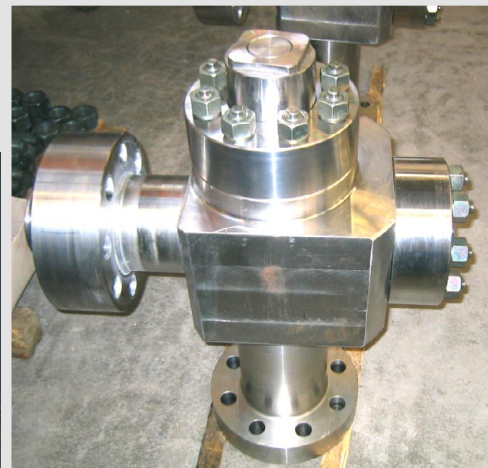

Size code		Pressure class code	Connection code	Configuration code
DN 80	= 10	PN 64 (300lbs) = 5	F =DIN Flanges	V = Vertical Installation
DN 100	= 11	PN 100 (600lbs) = 6	U = ASME Flanges	H = Horizontal Installation
DN 125	= 12	PN 160 (900lbs) = 7	S = Welding Ends	A = Manual Start-up
DN 150	= 13	PN 250 (1500lbs)= 8		W = Oversized Bypass or Start-up connection
DN 200	= 15	PN 320 = 9		CS = Carbon Steel Body
DN 250	= 16	PN 400 (2500lbs)= 0		SS = Stainless Steel Body
DN 300	= 17	PN 500 = A		SD = Duplex Steel Body
		PN 640 = B		

Example:

MRM 150 UVW-CS: Valve type MRM, 8", 2500 lbs, ASME flanges, vertical installation, housing material carbon steel

SCHROEDAHL

we protect your business

SCHROEDAHL-ARAPP

Spezialarmaturen GmbH & Co. KG

Schoenenbacher Str. 4
51580 Reichshof-Mittelagger
Germany

Phone +49 2265 9927-0

Fax +49 2265 9927-927

www.schroedahl.com

info@schroedahl.com

Schroedahl International Corporation

2400 Augusta Dr. Suite 285

Houston, Texas 77057

United States of America

Phone +1 713 9758351

Fax +1 713 7800421

sic@schroedahl.com